



Enviromat[®]


Green Roof Edging

- **Product Range**
 - Roof edging 100mm face
 - Roof edging 50mm face
 - Roof edging 100mm connector
 - Roof edging 50mm connector
- **Standard Length**
 - 1,000mm
- **Face Height**
 - Available in 50mm or 100mm
 - This product is supplied by the single piece
 - Thickness: 1.2mm
 - All measurements are approximate.*
- **Details**
 - Lightweight aluminium edging. Available in two face heights to suit our range of living roof products. 33 laser cut slots per metre allow the free draining of water, whilst retaining pebbles or substrate. The base on both versions is 100mm wide allowing the weight of the green roof system or pebbles to hold it in place.
 - The aluminium finish is both durable, rust resistant and lightweight making installation easy. The matching connectors also feature the same laser cut slots for both drainage and aesthetics. The connectors can be used for straight joints or bent easily to form internal or external angles.
 - For added strength, 9 laser cut holes in the base enable firm bedding when required.
- **Uses**
 - Living roof edge restraint
 - Separating substrates
 - Green roof edge restraint

A lightweight aluminium roof edging suitable for a range of applications.

Features

- Lightweight and durable
- Weather resistant
- Easy to install and cut
- Available in 2 sizes to cover all applications
- Connectors can be used for straight or angle joints.
- Maximum drainage without compromising strength.

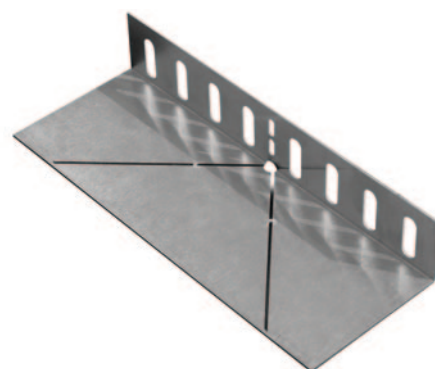

Important - We recommend wearing gloves when handling or installing this product.

 **Turfonline.**